

الاسم:
الرقم:

مسابقة في مادة الفيزياء
المدة ساعتان

This exam is formed of three exercises in three pages.
The use of non-programmable calculator is recommended.

First exercise: (7 points)

The flash of a camera

The electronic flash of a camera is made primarily of a capacitor of capacitance C , a flash lamp and of an electronic circuit which transforms the constant voltage $E = 3 \text{ V}$ provided by two dry cells into a constant voltage $U_0 = 300 \text{ V}$. The aim of this exercise is to show the importance of the electronic circuit in the electronic flash of a camera.

A – Determination of the value of the capacitance C of the capacitor

To determine the value of the capacitance C of the capacitor, we connect the circuit of figure 1 where the resistor has a large resistance R , the DC generator maintains across its terminals a constant voltage $E = 3 \text{ V}$. An appropriate device allows to plot the curve representing the variations of the current i as a function of time. The capacitor, being uncharged, at the instant $t_0 = 0$, we close the circuit. We obtain the graph of figure 2.

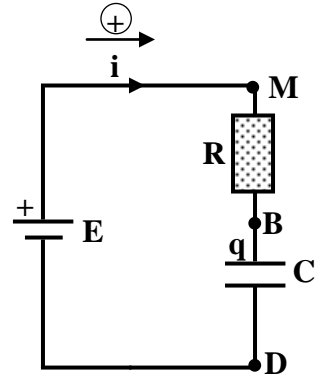


Fig. 1

- 1) a) Determine the expression of the current i in terms of C and the voltage $u_C = u_{BD}$ across the terminals of the capacitor.
- b) By applying the law of addition of voltages, determine the differential equation of the voltage u_C .
- 2) The solution of this differential equation is given by:

$$u_C = E(1 - e^{-\frac{t}{\tau}}) \text{ where } \tau = RC.$$

- a) Determine, as a function of time t , the expression of the current i .
- b) Deduce, at the instant $t_0 = 0$, the expression of the current I_0 in terms of E and R .
- c) Using figure 2:
 - i) calculate the value of the resistance R of the resistor;
 - ii) determine the value of the time-constant τ of the circuit.
- d) Deduce that $C \approx 641 \mu\text{F}$.

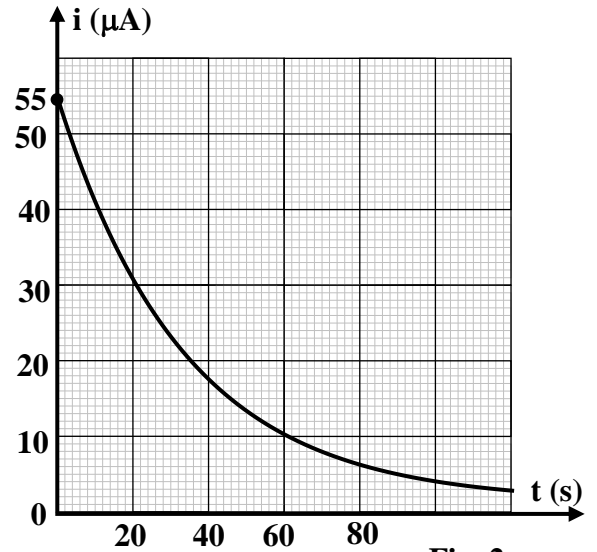


Fig. 2

B – Energetic Study

- 1) Show that the electric energy stored in the capacitor, when it is completely charged under the voltage E is $W \approx 2.9 \times 10^{-3} \text{ J}$.
- 2) The capacitor, being totally charged, is disconnected from the circuit and discharges through a resistor of same resistance R . Calculate:
 - a) the duration at the end of which the capacitor can be practically completely discharged ;
 - b) the average power given by the capacitor during the discharging process.

C – The flash of the camera

The discharge in the flash lamp causes a flash of duration approximately one millisecond .

- 1) Determine the value of the average electric power P_e consumed by this flash if the capacitor is charged under the voltage:
 - a) $E = 3 \text{ V}$;
 - b) $U_0 = 300 \text{ V}$.
- 2) Explain why it is necessary to raise the voltage before applying it across the terminals of the capacitor.

Second exercise: (7 points)

Measurement of the gravitational acceleration

In order to measure the gravitational acceleration, we consider a spring of stiffness k and of negligible mass, connected from its upper end to a fixed support while its other end carries a solid (S) of mass m . At equilibrium the center of mass G of (S) coincides with a point O and the spring elongates by $\Delta l_0 = x_0$ (adjacent figure).

We denote by g the gravitational acceleration.

The spring is stretched by pulling (S) vertically downwards from its equilibrium position, then releasing it without initial velocity at instant $t_0 = 0$. G oscillates around its equilibrium position O . At an instant t , G is defined by its abscissa $x = \overline{OG}$ and the algebraic value of its velocity is

$$v = \frac{dx}{dt}.$$

The horizontal plane passing through O is taken as a reference of gravitational potential energy.

A – Static study

- 1) Name the external forces acting on (S) at the equilibrium position.
- 2) Determine a relation among m , g , k and x_0 .

B – Energetic study


- 1) Write, at an instant t , the expression of the :
 - a) kinetic energy of (S) in terms of m and v ;
 - b) elastic potential energy of the spring in terms of k , x and x_0 ;
 - c) gravitational potential energy of the system [(S), Earth] in terms of m , g and x .
- 2) Show that the expression of the mechanical energy of the system [(S), spring, Earth] is given by:

$$ME = \frac{1}{2} mv^2 + \frac{1}{2} k (x + x_0)^2 - mgx.$$

- 3) a) Applying the principle of the conservation of the mechanical energy, show that the differential equation in x that describes the motion of G has the form of : $x'' + \frac{k}{m} x = 0$.
 - b) Deduce the expression of the proper period T_0 of the oscillator in terms of m and k .
 - c) Show that the expression of T_0 is given by: $T_0 = 2\pi \sqrt{\frac{x_0}{g}}$.

C – Experimental study

For different solids of different masses suspended to the same spring, we measure using a stop watch the corresponding values of T_0 . The results are collected in the following table:

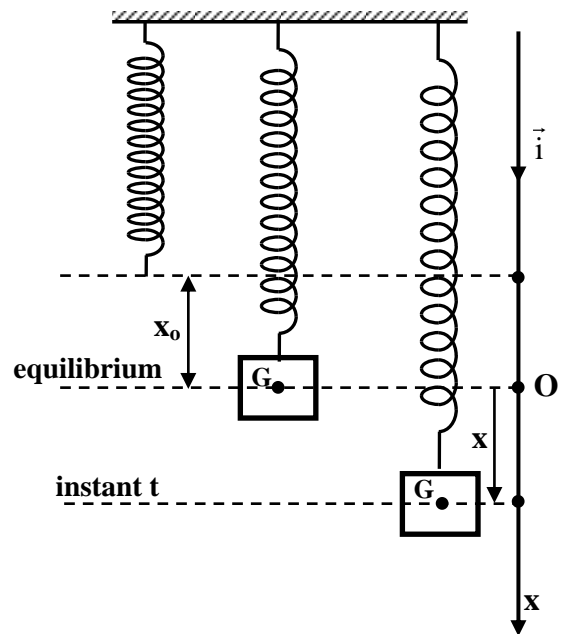

m (g)	20	40	60	80	100
x_0 (cm)	4	8	12	16	20
T_0 (s)	0.4	0.567	0.693	0.8	0.894
T_0^2 (s ²)	0.16		0.48	0.64	


- Complete the table.
- Plot the curve giving the variations of x_0 as a function of T_0^2 .
Scale : on the abscissa-axis: 1cm represents 0.16 s²
on the ordinate –axis: 1cm represents 4 cm.
- Determine the slope of this curve and, using the expression $T_0 = 2\pi \sqrt{\frac{x_0}{g}}$, deduce the value of the gravitational acceleration.

Third exercise: (6 points)

Interference of light

Consider Young's double slit apparatus that is represented in the adjacent figure. S_1 and S_2 are separated by a distance $a = 1$ mm.

The planes (P) and (E) are at a distance $D = 2$ m. I is the midpoint of $[S_1S_2]$ and O is the orthogonal projection of I on (E). On the perpendicular to IO at point O and parallel to S_1S_2 , a point M is defined by its abscissa $OM = x$.

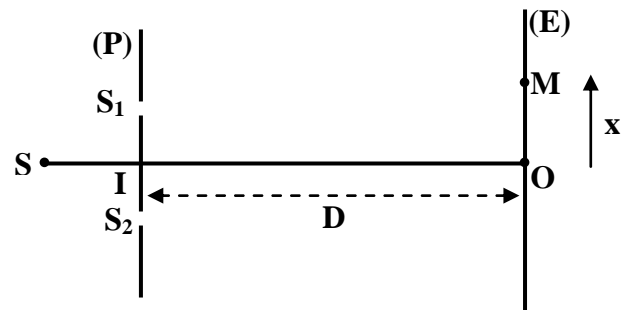

The optical path difference δ at M ($\overline{OM} = x$), located in the

interference region on the screen of observation is: $\delta = SS_2M - SS_1M = \frac{ax}{D}$.

A – The source S emits a monochromatic light of wavelength λ in air.

- The phenomenon of interference of light shows evidence of an aspect of light. Name this aspect.
- Indicate the conditions for obtaining the phenomenon of interference of light.
- Describe the interference fringes that observed on (E).
- Determine the expression giving the abscissa of the centers of the bright fringes and that of the centers of the dark fringes.
- Deduce the expression of the interfringe distance in terms of λ , D and a.

B – The source S emits white light which contains all the visible radiations of wavelengths λ in vacuum or in air where: $400 \text{ nm (violet)} \leq \lambda \leq 800 \text{ nm (red)}$.

- The obtained central fringe is white. Justify.
- Compare the positions of the centers of the first bright fringes corresponding to red and violet colors on the same side of O.
- The point M has an abscissa $x = 4$ mm.

a) Show that the wavelengths of the radiations that reach M in phase are given by: λ (in nm) = $\frac{2000}{k}$,

k being a non- zero positive integer.

b) Determine the wavelengths of these radiations.

C – The source S emits two radiations of wavelengths $\lambda_1 = 450 \text{ nm}$ and $\lambda_2 = 750 \text{ nm}$.


Determine the abscissa x of the nearest point to O, where two dark fringes coincide.

الدورة الإستثنائية للعام ٢٠١٥	امتحانات الشهادة الثانوية العامة الفرع : علوم الحياة	وزارة التربية والتعليم العالي المديرية العامة للتربية دائرة الامتحانات
الاسم: الرقم:	مسابقة في مادة الفيزياء المدة ساعتان	مشروع معيار التصحيح

First exercise (7 points)

Part of the Q	Answer	Mark
A.1.a	The expression of i : $i = \frac{dq}{dt} = C \frac{du_C}{dt}$	0.5
A.1.b	$u_{MD} = u_{MB} + u_{BD} \Rightarrow E = Ri + u_C \Rightarrow E = RC \frac{du_C}{dt} + u_C$	0.5
A.2.a	$i = C \frac{du_C}{dt} = C \frac{E}{RC} e^{-\frac{t}{\tau}}, \Rightarrow i = \frac{E}{R} e^{-\frac{t}{\tau}}$.	0.5
A.2.b	At the instant $t_0 = 0$, $I_0 = \frac{E}{R}$.	0.25
A.2.c.i	At the instant $t_0 = 0$, $I_0 = 55 \mu A \Rightarrow R = 54545.45 \Omega$.	0.5
A.2.c.ii	For $i = 0.37 I_0 = 20.35 \approx 20 \mu A$, $t = \tau = 35$ s.	0.75
A.2.d	$\tau = RC \Rightarrow C = 641 \mu F$.	0.5
B.1	Electric energy $W = \frac{1}{2} CE^2 = \frac{1}{2} \times 641 \times 10^{-6} \times 9 = 2.9 \times 10^{-3} J$	0.5
B.2.a	The duration: $\Delta t = 5\tau = 175$ s.	0.5
B.2.b	The average power of the discharge : $\frac{W}{\Delta t} = \frac{2.9 \times 10^{-3}}{175} = 1.65 \times 10^{-5} W$	0.75
C.1.a	$W_1 = \frac{1}{2} CE^2 = 2.9 \times 10^{-3} J \Rightarrow P_1 = \frac{W_1}{t} = 2.9 W$.	0.5
C.1.b	$W_2 = \frac{1}{2} C U_0^2 = 28.845 J \Rightarrow P_2 = \frac{W_2}{t} = 28845 W$	0.75
C.3	To increase the power consumed by the flash lamp during discharge.	0.5

Second exercise (7 points)

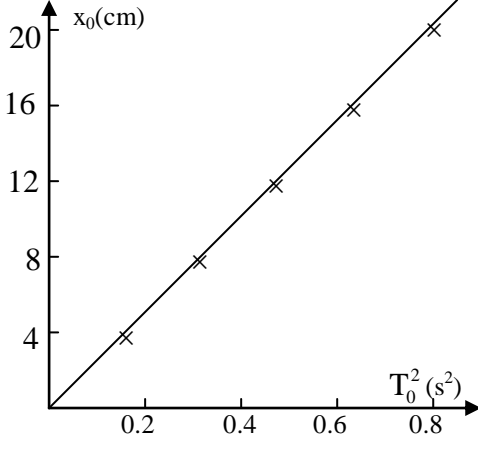Part of the Q	Answer	Mark
A.1	The weight $m\vec{g}$ and the force of tension \vec{T} in the spring	0.5
A.2	At equilibrium, $\vec{T} = -m\vec{g} \Rightarrow T = mg \Rightarrow mg = kx_0$.	0.75
B.1.a	$KE = \frac{1}{2} mV^2$	0.25
B.1.b	$PE_{el} = \frac{1}{2} k(x+x_0)^2$	0.25
B.1.c	$PE_g = -mgx$	0.25
B.2	$ME = KE + PE_{el} + PE_g$ $ME = \frac{1}{2} mV^2 + \frac{1}{2} k(x+x_0)^2 - mgx$.	0.25
B.3.a	ME is conserved $\Rightarrow \frac{dME}{dt} = 0 \Rightarrow \frac{1}{2} m2vx'' + \frac{1}{2} k2(x+x_0)v - mgv = 0$ $\Rightarrow V(mx'' + kx_0 - mg + kx) = 0$ But $V \neq 0$ and $mg = kx_0$ therefore $x'' + \frac{k}{m}x = 0$.	1
B.3.b	This differential equation is of the form $x'' + \omega_0^2 x = 0$ therefore : $\omega_0 = \sqrt{\frac{k}{m}}$ and $T_0 = \frac{2\pi}{\omega_0} = 2\pi \sqrt{\frac{m}{k}}$	1
B.3.c	$mg = kx_0 \Rightarrow \frac{m}{k} = \frac{x_0}{g} \Rightarrow T_0 = 2\pi \sqrt{\frac{x_0}{g}}$	0.5
C.1	The missed values are :0.321; 0.799 .	0.5
C.2	See figure 	0.5
C.3	The curve is a straight line passing through the origin. The slope is : $a = \frac{x_0}{T_0^2} = 0.25 \text{ m/s}^2$. On the other hand : $T_0^2 = 4\pi^2 \frac{x_0}{g}$ and $g = 4\pi^2 \frac{x_0}{T_0^2}$ $\Rightarrow g = 9.86 \text{ m/s}^2$.	1.25

Third exercise (6 points)

Part of the Q	Answer	Mark
A.1	The wave aspect of light	0.5
A.2	The two sources S_1 and S_2 are monochromatic and coherent	0.5
A.3	We observe interference fringes : - alternate bright and dark fringes ; - rectilinear and equidistant - parallel of S_1 and S_2	0.5
A.4	Bright fringe: $\delta = k\lambda = \frac{ax}{D} \Rightarrow x = \frac{k\lambda D}{a}$. Dark fringe: $\delta = (2k+1)\lambda = \frac{ax}{D} \Rightarrow x = \frac{(2k+1)\lambda D}{2a}$	1
A.5	$i = x_{k+1} - x_k = (k+1) \frac{\lambda D}{a} - \frac{k\lambda D}{a} = \frac{\lambda D}{a}$	0.5
B.1	each radiation of the white light gives out at O a bright fringe; the superposition of all radiation at O gives the white color	0.5
B.2	$x_v = k \frac{\lambda_v D}{a}$ et $x_R = k \frac{\lambda_R D}{a} \Rightarrow \lambda_R > \lambda_v \Rightarrow x_R > x_v$	0.5
B.3.a	$x = \frac{k\lambda D}{a} \Rightarrow 4 \times 10^6 \text{ (in nm)} = \frac{k\lambda \times 2 \times 10^9}{1 \times 10^6} \Rightarrow \lambda \text{ (in nm)} = \frac{2000}{k}$	0.5
B.3.b	$400 \leq \lambda = \frac{2000}{k} \leq 800 \Rightarrow$ $2.5 \leq k \leq 5 \Rightarrow k = 3, 4 \text{ and } 5$ $\Rightarrow \lambda_1 = \frac{2000}{3} = 667 \text{ nm} ; \lambda_2 = \frac{2000}{4} = 500 \text{ nm} ; \lambda_3 = \frac{2000}{5} = 400 \text{ nm} .$	0.75
C	The abscissa of points on the screen where the radiations arrive in opposition of phase is: $x = \frac{(2k+1)\lambda D}{2a} \Rightarrow$ $\frac{(2k_1+1)\lambda_1 D}{2a} = \frac{(2k_2+1)\lambda_2 D}{2a} \Rightarrow$ $\frac{(2k_1+1)\lambda_1 D}{2a} = \frac{(2k_2+1)\lambda_2 D}{2a} \Rightarrow \frac{(2k_1+1)}{(2k_2+1)} = \frac{\lambda_2}{\lambda_1} = \frac{5}{3} ;$ $\lambda_1 < \lambda_2 \Rightarrow k_1 > k_2 ;$ $900k_1 + 450 = 1500k_2 + 750 \Rightarrow 3k_1 - 5k_2 = 1.$ This equation is verified for $k_1 = 2$ and $k_2 = 1$ (first solution) $x \text{ (in mm)} = \frac{(4+1)450 \times 10^{-6} \times 2 \times 10^3}{2 \times 1} = 2.25 \text{ mm}.$	0.75