

الاسم:
الرقم:

مسابقة في مادة الفيزياء
المدة: ساعتان ونصف

This exam is formed of four obligatory exercises in four pages.
The use of non-programmable calculator is recommended.

Exercise 1 (5 pts)

Simple pendulum

A simple pendulum consists of a particle of mass $m = 50 \text{ g}$ attached from the lower end A of a massless and inextensible string OA of length ℓ .

This pendulum may oscillate in the vertical plane about a horizontal axis (Δ) passing through the upper extremity O of the string.

The pendulum is shifted in the negative direction from its equilibrium position. At an instant $t_0 = 0$, the angular abscissa of the pendulum is $\theta_0 = -\frac{\pi}{36}$ rad, and the particle is launched in the

positive direction with a velocity \vec{V}_0 of magnitude V_0 (Doc. 1).

At an instant t , the angular abscissa of the pendulum is θ and the

speed of the particle is $v = \ell |\theta'| = \ell \left| \frac{d\theta}{dt} \right|$ (Doc. 2).

Take:

- the horizontal plane containing A_0 , the position of A at equilibrium, as the reference level for gravitational potential energy;
- $g = 10 \text{ m/s}^2$.

1) Suppose that the pendulum oscillates without friction. The second order differential equation in θ that describes the motion of the pendulum is:

$$\theta'' + 20 \theta = 0 \quad (\text{SI}).$$

1.1) The pendulum performs simple harmonic motion. Justify.

1.2) Calculate the value of the proper (natural) period T_0 of the pendulum.

1.3) Knowing that the proper period of the pendulum is $T_0 = 2\pi \sqrt{\frac{\ell}{g}}$, show that $\ell = 50 \text{ cm}$.

1.4) The mechanical energy of the system (Pendulum, Earth) at an instant t is ME.




1.4.1) Show that the expression of the mechanical energy is $ME = \frac{1}{2} m v^2 + m g \ell (1 - \cos\theta)$.

1.4.2) Deduce the value of V_0 knowing that $ME_0 = 1.95 \times 10^{-3} \text{ J}$ at $t_0 = 0$.

2) In reality the pendulum is submitted to a force of friction. We repeat the above experiment and an appropriate device shows the angular abscissa θ of the pendulum as a function of time (Doc. 3).

Using document 3:

- indicate the type of oscillations;
- calculate the mechanical energy of the system (Pendulum, Earth) at $t = 0.52 \text{ s}$;
- deduce the average power lost by the system (Pendulum, Earth) between $t_0 = 0$ and $t = 0.52 \text{ s}$.

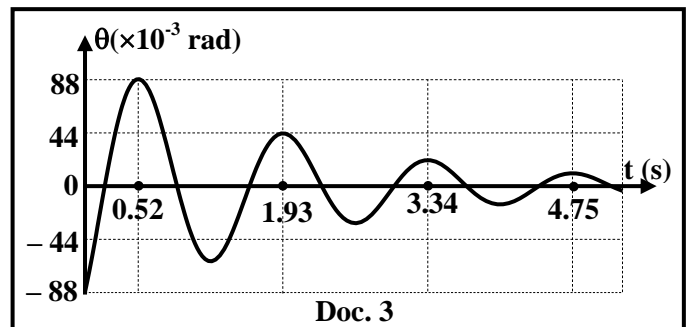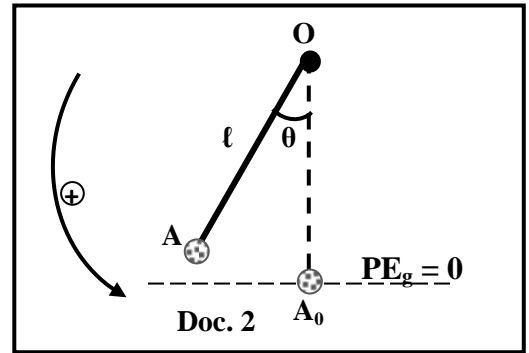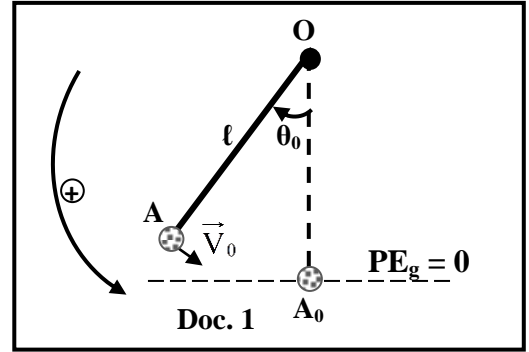


Exercise 2 (5 pts)

Characteristics of electric components

The aim of this exercise is to determine the capacitance C of a capacitor and the inductance L of a coil. For this purpose, we connect the circuit of document 4 which includes:

- an ideal battery G of electromotive force $E = 2 \text{ V}$;
- a resistor of resistance $R = 1 \text{ k}\Omega$;
- a capacitor of capacitance C ;
- a coil of inductance L and negligible resistance;
- a switch K .

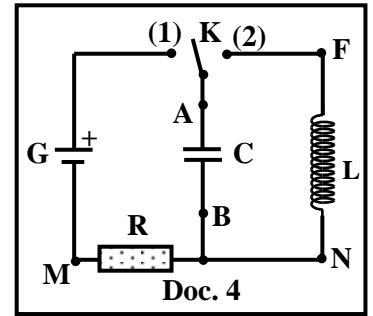

1) Series (R-C) circuit

The capacitor is initially uncharged. At the instant $t_0 = 0$, we turn K to position (1). At an instant t , the charge of plate A is q and the current in the circuit is i (Doc. 5).

1.1) Name the physical phenomenon that takes place in the circuit.

1.2) Show that the differential equation that governs the variation of the voltage

$$u_{AB} = u_C \text{ across the capacitor is: } \tau \frac{du_C}{dt} + u_C = E, \text{ where } \tau = RC \text{ is the time constant of the circuit.}$$

1.3) $u_C = 2(1 - e^{-1000t})$ (u_C in V and t in s) is a solution of this differential equation. Determine the value of τ .

1.4) Deduce the value of C .

2) (L-C) circuit

The capacitor is fully charged. At an instant $t_0 = 0$, taken as a new initial time, we turn K to position (2).

At an instant t , the charge of plate A is q and the current in the circuit is i (Doc.6).

2.1) Derive the differential equation that governs the variation of the charge q .

2.2) Deduce that the expression of the proper (natural) period T_0 of the circuit is




$$T_0 = 2\pi\sqrt{LC}.$$

2.3) The curve of document 7 represents the electric energy W_C stored in the capacitor as a function of time.

Determine the value of T_0 knowing that

$T_0 = 2T_E$, where T_E is the period of the electric energy.

2.4) Deduce the value of L .

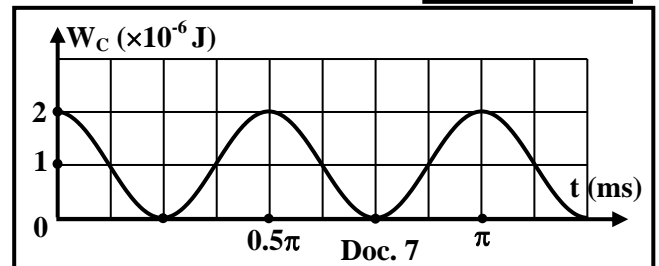

Exercise 3 (5 pts)

Self induction

We consider a coil of inductance L and resistance r , a resistor of resistance $R = 8 \Omega$, a switch K , an incandescent lamp and an ideal battery (G) of electromotive force $E = 10 \text{ V}$.

The aim of this exercise is to study the effect of the coil on the brightness of the lamp in a DC series circuit, and to determine its characteristics.


1) Brightness of the lamp

We set up successively circuit 1 and circuit 2 of document 8.

Statements 1 and 2 below describe the brightness of the lamp after closing K .

Statement 1: The lamp glows instantly at the instant of closing the switch.

Statement 2: After closing the switch, the brightness of the lamp increases gradually and becomes stable after a certain time.

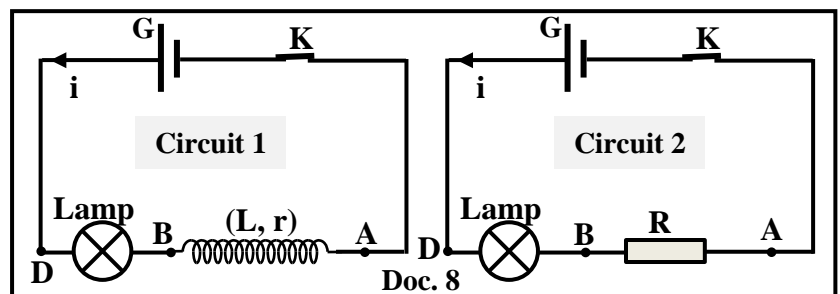


Match each statement to the convenient circuit.

2) Determination of L and r

We connect the coil and the resistor in series across (G) as shown in document 9.

At the instant $t_0 = 0$, K is closed.

At an instant t , the circuit carries a current i .

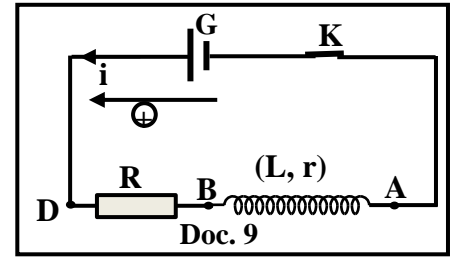

2.1) Prove, by applying the law of addition of voltages, that the differential equation that describes the variation of the voltage

$$u_{DB} = u_R \text{ is: } \frac{L}{R} \frac{du_R}{dt} + \left(\frac{R+r}{R} \right) u_R = E.$$

2.2) Deduce that the expression of the voltage across the

$$\text{resistor in the steady state is: } U_{R\max} = E \frac{R}{R+r}.$$

2.3) The solution of this differential equation is

$$u_R = U_{R\max} (1 - e^{-\frac{t}{\tau}}), \text{ where } \tau = \frac{L}{R+r}.$$


A convenient apparatus draws u_R as a function of time (Doc. 10).

2.3.1) Use document 10 to indicate the value of $U_{R\max}$.

2.3.2) Determine the value of r .

2.3.3) Use document 10 to determine the value of τ .

2.3.4) Deduce the value of L .

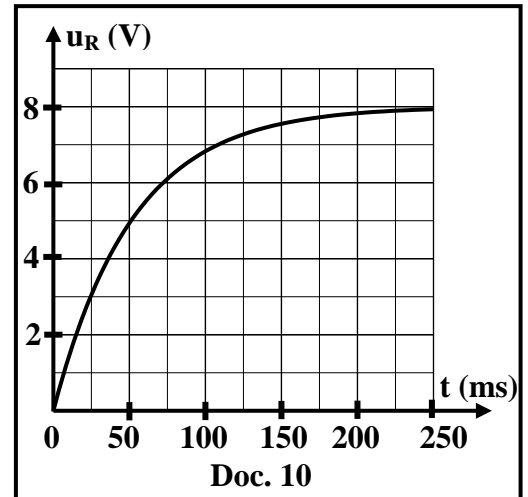

Exercise 4 (5 pts)

Stray bullets

The aim of this exercise is to determine the thermal energy produced during the motion of a bullet fired from a rifle and to show its danger.

A bullet (S) taken as a particle of mass $m = 7 \times 10^{-3}$ kg is fired from point O on the ground with an initial velocity $\vec{V}_0 = V_0 \vec{j}$. During the whole motion, the bullet is submitted to air resistance.

Take:

- $g = 10 \text{ m/s}^2$;
- the horizontal plane containing O as a reference level for gravitational potential energy.

1) Upward motion of the bullet

The bullet (S) is fired vertically upward from point O at an instant $t_0 = 0$. (S) moves along the y -axis of origin O oriented positively upward. (S) reaches point A of maximum height h at $t_1 = 9.84$ s (Doc.11).

The graph of document 12 represents the speed V of (S) as a function of time during its upward motion between O and A.



1.1) Determine, using document 12, the linear momenta \vec{P}_0 and \vec{P}_1 of (S) at $t_0 = 0$ and at $t_1 = 9.84$ s respectively.

1.2) Deduce the variation in the linear momentum $\Delta \vec{P}$ of (S) between t_0 and t_1 .

1.3) Given that $m\vec{g} + \vec{f} = \frac{\Delta \vec{P}}{\Delta t}$, where $\Delta t = t_1 - t_0$ and \vec{f} is the average friction force acting on (S)

during Δt . Prove that the magnitude of \vec{f} is $f \cong 0.364$ N.

1.4) Calculate the mechanical energy ME_0 of the system [(S)-Earth] at $t_0 = 0$.

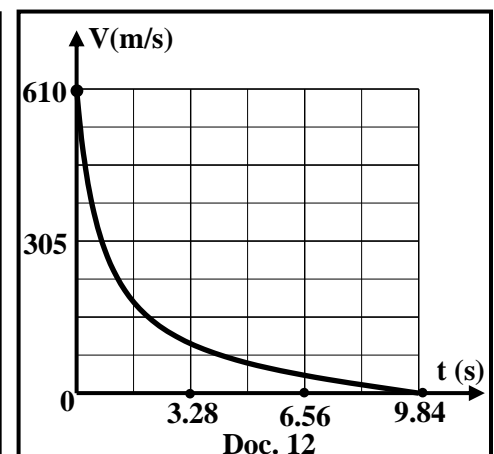

- 1.5) Given that $\Delta ME = -f \times h$, where ΔME is the variation in the mechanical energy of the system [(S)-Earth] during $\Delta t = t_1 - t_0$. Prove that $h \cong 3000$ m.
- 1.6) Deduce the value of the thermal energy W_{th1} produced during the upward motion of (S) knowing that $W_{th1} = |\Delta ME|$.


2) Downward motion of the bullet

Assume that the trajectory of (S) remains vertical.

(S) starts its downward motion from point A and passes through point B ($AB = 352$ m) and reaches the ground at O with a speed $V = 44$ m/s (Doc. 13). The magnitude of the friction force acting on (S) during its motion between B and O is $f_1 = 0.07$ N.

2.1) Determine the value of the thermal energy W_{th2} produced during the motion of (S) between B and O knowing that $W_{th2} = |W_{f_1}|$.

2.2) Calculate the thermal energy produced during the downward motion of (S) between A and O, knowing that the thermal energy produced during the downward motion of (S) between A and B is 18 J.

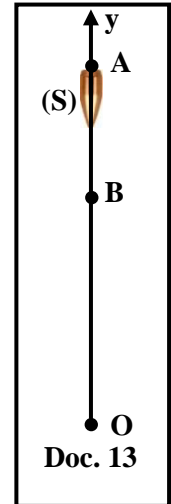

3) Danger of the stray bullet

The bullet can penetrate the skin of a human if its speed exceeds 61 m/s.

A bullet (S') identical to (S) is fired upward at a slight angle from the vertical (around 15°), it follows a curvilinear path and reaches the ground at a speed 90 m/s.

Specify whether (S) or (S') is more dangerous when hitting a human as it reaches the ground.

الاسم:
الرقم:مسابقة في مادة الفيزياء
المدة: ساعتان ونصف

Exercise 1 (5 pts)

Simple pendulum

Part	Answer	Mark
1	1.1 The differential equation $\theta'' + 20\theta = 0$ is of the form: $\theta'' + \omega_0^2\theta = 0$, then it is a simple harmonic motion.	0.25
	1.2 $\omega_0 = \sqrt{20}$ rad/s $T_0 = \frac{2\pi}{\omega_0} = \frac{2\pi}{\sqrt{20}}$, then $T_0 = 1.405$ s	0.75
	1.3 $T_0 = 2\pi\sqrt{\frac{\ell}{g}}$, then $1.405 = 2\pi\sqrt{\frac{\ell}{10}}$, hence $1.974 = 4\pi^2 \frac{\ell}{10}$, so $\ell = 0.5$ m	0.5
	1.4 1 ME = KE + GPE But, GPE = m g z = m g (\ell - \ell \cos \theta) = m g \ell (1 - \cos \theta) (Figure) KE = $\frac{1}{2} I \theta'^2$, but $I = m \ell^2$ and $v = \ell \theta'$ Then, ME = $\frac{1}{2} m v^2 + mg\ell (1 - \cos \theta)$	1
2	ME ₀ = $\frac{1}{2} m V_0^2 + mg\ell (1 - \cos \theta_0)$ $1.95 \times 10^{-3} = \frac{1}{2} \times 0.05 V_0^2 + 0.05 \times 10 \times 0.5 [1 - \cos(\frac{-\pi}{36})]$, then $V_0 = 0.2$ m/s	0.75
2	2.1 Free undamped mechanical oscillations	0.25
	2.2 ME _(0.52) = $0 + mg\ell(1 - \cos \theta_{(0.52)}) = 0.05 \times 10 \times 0.5 [1 - \cos(88 \times 10^{-3})]$ Then, ME _(0.52) = 9.67×10^{-4} J	0.5
	2.3 P _{average} = $\frac{ME_{lost}}{\Delta t} = \frac{1.95 \times 10^{-3} - 9.67 \times 10^{-4}}{0.52}$ Then, P _{average} = 1.89×10^{-3} W	0.5 0.5

Exercise 2 (5 pts)

Characteristics of electric components

Part	Answer	Mark
1	1.1 Charging the capacitor	0.25
	1.2 $q = C u_C$ and $i = + \frac{dq}{dt}$, then $i = C \frac{du_C}{dt}$ $u_{AM} = u_{AB} + u_{BM}$, thus $E = u_C + R i = u_C + RC \frac{du_C}{dt}$ But, $\tau = RC$, hence $E = u_C + \tau \frac{du_C}{dt}$	0.75
	1.3 $u_C = 2(1 - e^{-1000t})$, then $\frac{du_C}{dt} = 2000 e^{-1000t}$ Substituting in the above differential equation gives: $E = 2 - 2 e^{-1000t} + \tau \times 2000 e^{-1000t}$ $E = 2 + (-2 + 2000 \tau)e^{-1000t}$, but $e^{-1000t} = 0$ is rejected Then, $-2 + 2000 \tau = 0$, hence $\tau = 10^{-3}$ s	1
	1.4 $\tau = RC$, then $C = \frac{\tau}{R} = \frac{10^{-3}}{1000}$, so $C = 10^{-6}$ F = 1 μ F	0.5
2	2.1 $u_{AB} = u_{AF} + u_{FN} + u_{NB}$, then $\frac{q}{C} = 0 + L \frac{di}{dt} + 0$ $i = - \frac{dq}{dt} = -q'$, then $i' = - \frac{d^2q}{dt^2} = -q''$ $\frac{q}{C} = -L q''$, then : $q'' + \frac{1}{LC} q = 0$	1
	2.2 The differential equation is of the form of : $q'' + \omega_0^2 q = 0$, then $\omega_0 = \frac{1}{\sqrt{LC}}$ $T_0 = \frac{2\pi}{\omega_0}$, then $T_0 = 2\pi \sqrt{LC}$	0.5
	2.3 Graphically, $T_E = 0.5 \pi$ ms , then $T_0 = 2T_E = 2 \times 0.5 \pi$, so $T_0 = \pi$ ms	0.5
	2.4 $T_0^2 = 4 \pi^2 L C$, then $(\pi \times 10^{-3})^2 = 4 \pi^2 L (10^{-6})$, so $L = 0.25$ H	0.5

Exercise 3 (5 pts)

Self induction

Part	Answer	Mark	
1	Statement 1 corresponds to circuit 2	0.25	
	Statement 2 corresponds to circuit 1	0.25	
2	$u_{DA} = u_{DB} + u_{BA}$ $E = u_R + ri + L \frac{di}{dt}$ $u_{BD} = u_R = R i \quad , \text{ then } \quad i = \frac{u_R}{R} \quad , \text{ hence } \quad \frac{di}{dt} = \frac{1}{R} \frac{du_R}{dt}$ <p>Then, $E = u_R + r \frac{u_R}{R} + \frac{L}{R} \frac{du_R}{dt}$</p> <p>So: $\frac{L}{R} \frac{du_R}{dt} + \left(\frac{R+r}{R}\right) u_R = E$</p>	1.25	
	<p>In the steady state: $i = \text{constant}$; then, $\frac{du_R}{dt} = 0$, and i is maximum , then $u_R = U_{R\text{max}}$</p> <p>Substituting in the differential equation gives :</p> $0 + \left(\frac{R+r}{R}\right) U_{R\text{max}} = E \quad , \text{ thus } \quad U_{R\text{max}} = E \frac{R}{R+r}$	1	
	1	$U_{R\text{max}} = 8 \text{ V}$	0.25
	2	$U_{R\text{max}} = E \frac{R}{R+r}$, so $8 = 10 \frac{8}{8+r}$, hence $r = 2 \Omega$	0.75
	3	At $t = \tau$: $u_R = 63 \% U_{R\text{max}} = 0.63 \times 8 = 5.04 \text{ V}$ Graphically : for $u_R = 0.63 U_{R\text{max}} = 5.04 \text{ V}$, $t = \tau = 50 \text{ ms}$	0.25 0.5
4	$\tau = \frac{L}{R+r}$, thus $L = \tau (R+r) = 0.05 \times (8+2)$, so $L = 0.5 \text{ H}$	0.5	

Exercise 4 (6 pts)

Stray bullets

Part	Answer	Mark
1	$\vec{P}_0 = m \vec{V}_0 = 7 \times 10^{-3} \times 610 \vec{j}$, then $\vec{P}_0 = 4.27 \vec{j}$ (kg.m/s) $\vec{P}_1 = m \vec{V}_1 = \vec{0}$, since $\vec{V}_1 = \vec{0}$	<p>0.5</p> <p>0.25</p>
	$\Delta \vec{P} = \vec{P}_1 - \vec{P}_0 = \vec{0} - 4.27 \vec{j}$, so $\Delta \vec{P} = -4.27 \vec{j}$ (kg.m/s)	0.5
	$m \vec{g} + \vec{f} = \frac{\Delta \vec{P}}{\Delta t}$ Projecting the vectors along the y-axis gives : $-mg - f = \frac{\Delta P}{\Delta t}$ Then, $-7 \times 10^{-3} \times 10 - f = \frac{-4.27}{9.84}$, thus $f \cong 0.364 \text{ N}$	0.75
	$ME_0 = KE_0 + PE_{g0} = \frac{1}{2} m V_0^2 + m g h_0 = \frac{1}{2} \times (7 \times 10^{-3}) \times 610^2 + 0$ Then , $ME_0 = 1302.35 \text{ J}$	0.5
	$ME_1 = KE_1 + PE_{g1} = \frac{1}{2} m V_1^2 + mgh = 0 + 7 \times 10^{-3} \times 10 h = 0.07 h$ $\Delta ME = W_{\vec{f}}$, then $ME_1 - ME_0 = -f \times h$ $0.07 h - 1302.35 = -0.364 h$; therefore , $h \cong 3000 \text{ m}$	0.75
	$\Delta ME = W_{\vec{f}} = -f h = -0.364 \times 3000 = -1092 \text{ J}$ $W_{th1} = \Delta ME = 1092 \text{ J}$	0.25
2	$W_{th2} = W_{\vec{f}_1} $, and $W_{\vec{f}} = -f_1 \times BO$ $BO = AO - AB = 3000 - 352 = 2648 \text{ m}$ $W_{\vec{f}} = -0.07 \times 2648 = -185.36 \text{ J} \cong -185 \text{ J}$, then $W_{th2} \cong 185 \text{ J}$	0.75
	$W_{thermal} = 18 + 185 = 203 \text{ J}$	0.25
3	For S : $V_{ground} = 44 \text{ m/s} < 61 \text{ m/s}$ For S' : $V_{ground} = 90 \text{ m/s} > 61 \text{ m/s}$ Therefore, S' is more dangerous than S	0.5